

DS-2CE1682P(N)-IT1

600TVL Outdoor EXIR Bullet Camera




EXIR



Key features

- 1/3" DIS
- EXIR Technology
- True Day/Night
- 600 TVL Horizontal Resolution
- 20m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

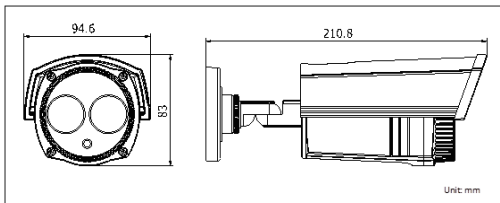

| DS-2CE1682P(N)-IT1 | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1/3" DIS |
| Signal System | PAL/NTSC |
| Effective Pixels | 720 (H)×480 (V) |
| Min. Illumination | 0.1 Lux @ (F1.2,AGC ON),0 Lux with IR |
| Shutter speed | PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s |
| Lens | 3.6mm (2.8mm,6mm,8mm optional) Angle of view: 68.4° (3.6 mm) |
| Lens Mount | M12 |
| Day & Night | IR cut filter with auto switch |
| Horizontal Resolution | 600 TVL |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| S/N Ratio | More than 52 dB |
| General | |
| Working Temperature/ Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 V DC |
| Power Consumption | MAX.5W |
| Ingress Protection | IP66 |
| IR Range | 20 meters |
| Dimensions | 94.6×83×210.8mm(3.72"×3.27"×8.30") |
| Weight | 700 g (1.54 lbs) |

Available models

PAL: DS-2CE1682P-IT1
NTSC: DS-2CE1682N-IT1