


DS-2CE5512P(N)-IRP 500TVL IR DIS Dome Camera

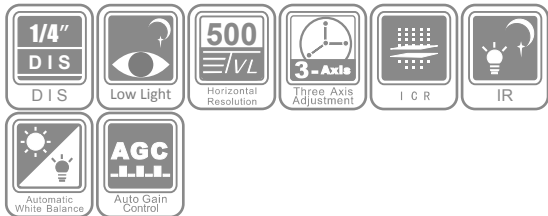

Specifications

DS-2CE5512P(N)-IRP	
Camera	
Image sensor	1/4" DIS
Signal system	PAL/NTSC
Effective pixels	640 (H) × 480 (V)
Min. illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR
Shutter time	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	2.8 mm @ F1.8 (3.6 mm, 6 mm optional) Angle of view: 66.2° (2.8 mm)
Lens mount	M12
Angle adjustment	Pan: 0 - 360°; Tilt: 0 - 85°; Rotation: 0 - 360°
Day / night	IR cut filter with auto switch
Horizontal resolution	500 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω/BNC)
S/N ratio	More than 52 dB
General	
Operating conditions	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	4.5W MAX
IR Range	Approx. 10 to 20 meters
Dimension	Φ 89.5 × 69.8 mm (Φ 3.52" × 2.75")
Weight	200 g (0.44 lbs)

Available models

DS-2CE5512P-IRP, DS-2CE5512N-IRP

Key features

- 1/4" DIS
- 500 TVL resolution
- 20m IR range
- Low illumination
- True day / night
- 3-axis adjustment
- Wide operating temperature range

Dimensions

