


DS-2CE5582P(N)-IR


600 TVL DIS Outdoor IR Dome Camera

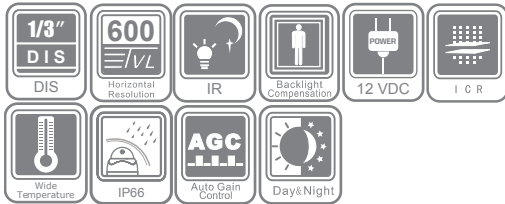

Key features

- 600 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20mm IR Distance
- Wide Operating Temperature Range:
-40°C to 60°C(-40°F to +140°F)

Dimensions

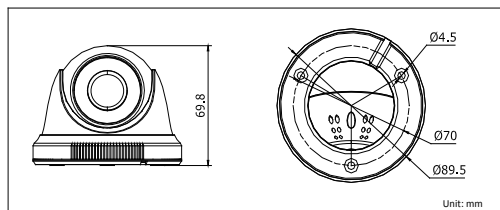

| DS-2CE5582P(N)-IR | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1/3" DIS |
| Signal System | PAL/NTSC |
| Effective Pixels | 720 (H) × 480 (V) |
| Min. Illumination | 0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.37 Lux @ (F2.3, AGC ON), 0 Lux with IR |
| Shutter speed | PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s |
| Lens | 3.6 mm @ F2.3 (2.8mm, 6 mm optional) |
| | Angle of view: 70.6° (3.6 mm) |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°; Tilt: 0 - 85°; Rotation: 0 - 360° |
| Day & Night | IR cut filter with auto switch |
| Horizontal Resolution | 600 TVL |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| S/N Ratio | More than 52 dB |
| General | |
| Working Temperature/ Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 V DC ± 10% |
| Power Consumption | Max. 2 W (Max. 5 W with IR cut filter on) |
| Ingress Protection | IP66 |
| IR Range | Approx. 10 to 20 meters |
| Dimensions | 89.6 × 59.1 mm (3.53" × 2.33") |
| Weight | 400 g (0.88 lbs) |

Available models

PAL: DS-2CE5582P-IR
NTSC: DS-2CE5582N-IR