


DS-2CE1512P(N)-IR IR Weather-proof DIS Bullet Camera

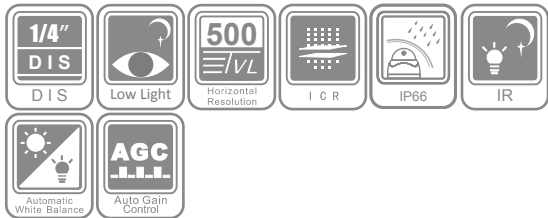

Specifications

DS-2CE1512P(N)-IR	
Camera	
Image sensor	1/4" DIS
Signal system	PAL / NTSC
Effective pixels	640 (H) × 480 (V)
Min. illumination	0.1 lux @ (F1.2, AGC on), 0 lux with IR 0.2 lux @ (F1.8, AGC on), 0 lux with IR
Shutter time	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	2.8 mm @ F1.8 (3.6 mm, 6 mm optional) Angle of view: 66.2° (2.8 mm)
Lens mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & night	IR cut filter with auto switch
Horizontal resolution	500 TVL
Synchronization	Internal synchronization
Video output	1 Vp-p composite output (75 Ω/BNC)
S/N ratio	More than 52dB
General	
Operating conditions	-40 °C ~ 60 °C (-40 °F ~ 140 °F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	4.5W MAX
Weather-proof rating	IP66
IR range	Approx 10 to 20 meters
Dimensions	Φ70×154.3 mm (Φ2.76" ×6.07")
Weight	450 g (0.99 lbs)

Available models

DS-2CE1512P-IR, DS-2CE1512N-IR

Key features

- 1/4" DIS
- 500TVL resolution
- 20m IR range
- Low illumination
- True day / night
- IP66 rating
- Wide operating temperature range

Dimensions

