


DS-2CE5512P(N)-IR 500TVL IR Weather-proof DIS Dome Camera

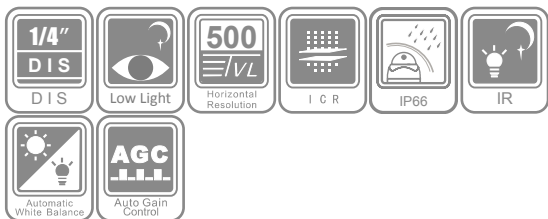

Specifications

DS-2CE5512P(N)-IR	
Camera	
Image sensor	1/4" DIS
Signal system	PAL / NTSC
Effective pixels	640(H) × 480(V)
Min. illumination	0.1 lux @ (F1.2, AGC ON), 0 lux with IR 0.2 lux @ (F1.8, AGC ON), 0 lux with IR
Shutter time	PAL: 1/25s ~ 1/15,000s NTSC: 1/30s ~ 1/15,000s
Lens	2.8mm @ F1.8 (3.6mm, 6mm optional) Angle of view: 66.2° (2.8mm)
Lens mount	M12
Angle adjustment	Pan: 0 ~ 355°; Tilt: 0 ~ 75°
Day & night	IR cut filter with auto switch
Horizontal resolution	500 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω / BNC)
S/N ratio	More than 52dB
General	
Operating conditions	-40°C ~ 60°C (-40°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	4.5W MAX
Weather-proof rating	IP66
IR range	Approx 10 to 20 meters
Dimensions	Φ 89.6 × 59.1mm (Φ 3.53" × 2.33")
Weight	400g (0.88 lbs)

Available models

DS-2CE5512P-IR, DS-2CE5512N-IR

Key features

- 1/4" DIS
- 500 TVL resolution
- 20m IR range
- Low illumination
- True day / night
- IP66 rating
- Wide operating temperature range

Dimensions

