

DS-2CD2010-I 1.3MP IR Mini Bullet Camera




Specifications

DS-2CD2010-I	
Camera	
Image sensor	1/3" progressive scan CMOS
Min. illumination	0.01 lux @F1.2, AGC ON 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	6mm @F1.2 (2.8mm, 4mm, 12mm, 16mm optional)
Lens mount	M12
Day & night	IR cut filter with auto switch
Compression Standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Image	
Max. Image Resolution	1280 × 960
Frame rate	50Hz: 25fps (1280 × 960), 25fps (1280 × 720) 60Hz: 30fps (1280 × 960), 30fps (1280 × 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Interoperability	ONVIF, PSIA, CGI
Security	User Authentication, watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
General	
Operating conditions	-10 °C ~ 60 °C (14°F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	max. 5.5W (ICR on: max. 8.5W)
Weather proof rating	IP66
IR range	Approx. 20 ~ 30 meters

Key features

- 1.3 megapixel high resolution
- HD video output
- Low illumination
- IP66 rating
- IR range: up to 30m
- True day / night

Dimensions

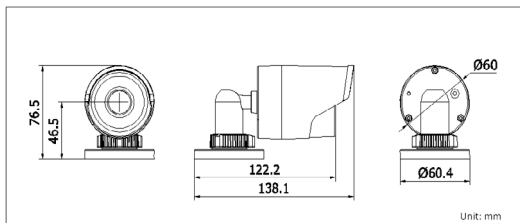

Available model

DS-2CD2010-I

* Product picture and technical specs subject to change without previous notice. For further information, please contact our local sales representatives.